

SPEC NO.	SP03AB15751-3060	ISSUED DATE	2019.01.09	PUBLISHED BY
PRODUCT NAME	PA025Z6D000	VERSION	01	
		PAGE	1/12	

SPECIFICATION

SPEC NO. : SP03AB15751-3060

PART NO. : 03A01BAJ002012T

PRODUCT NAME : PA025Z6D000

DESCRIPTION : Ceramic Patch Antenna(25×25×8.0mm)
Halogen Free ROHS Compliant Product

REVISION STATUS

VERSION	DATE	PAGE	REVISION DESCRIPTION	PREPARED	CHECKED	APPROVED
01	2019.01.09	Whole	New Issued.	徐嫚君	江哲宏	吳佳宗

Prepared By	Checked By	Approved By
徐嫚君	江哲宏	吳佳宗

SPEC NO.	SP03AB15751-3060	ISSUED DATE	2019.01.09	PUBLISHED BY
PRODUCT NAME	PA025Z6D000	VERSION	01	
		PAGE	2/12	

CIROCOMM TECHNOLOGY.

PART NUMBER: 03A01BAJ002012T

1 SCOPE

This specification covers the dielectric Patch antenna for **GPS L1+L5**.

2 Name of the product

This product is named "Dielectric Antenna".

3 Electrical characteristics

3-1 Electrical characteristics of antenna

The antenna has the electrical characteristics given in Table 1 under the *cirocomm* standard installation conditions shown in the figure.

Table 1

No	Parameter	Specification	Notes
1	Range Of Receiving Frequency	L1 : 1575.42±1.023MHz L5 : 1176.45±12MHz	
2	Center Frequency	L1 : 1575±3MHz L5 : 1175±3MHz	With 70×70 mm GND Plane
3	Bandwidth	L1 : 22MHz min L5 : 3MHz min	Return Loss@-10dB
4	VSWR	1.8 max	Center Frequency
5	Gain at Zenith	L1 : 1.8 dBi typ. L5 : 0.5 dBi typ.	Customer Prototype
6	Polarization	RHCP	Right Hand Circular Polarization
7	Impedance	50 Ohm	
8	Frequency Temperature Coefficient (τf)	-40°C to +105°C	0 ± 20ppm / °C
9	Operating Temperature	-40°C to +105°C	

※ Please follow the Golden Sample characteristics and compensation the instrument measurement value when IQC Inspection.

4 Environmental conditions

4-1 Operating conditions

The antenna has the electrical characteristics given in Tables 1 in the temperature range of -40°C to +105°C and under the environmental conditions of +40°C and 0-95% r.h..

4-2 Storage temperature range

The storage temperature range of product is -40°C to +105°C.



SPEC NO.	SP03AB15751-3060	ISSUED DATE	2019.01.09	PUBLISHED BY
PRODUCT NAME	PA025Z6D000	VERSION	01	
		PAGE	3/12	

4-3 Feed pin temperature range

Maximum temperature for soldering of feed pin is +290°C for 3 second.

5 Reliability tests

5-1 Low-temperature test

Expose the specimen to -40°C for 400 hours and then to normal temperature/humidity for 24 hours or more. After this test, examine its appearance and functions.

5-2 High-temperature test

Expose the specimen to +105°C for 400 hours and then to normal temperature/humidity for 24 hours or more. After this test, examine its appearance and functions.

5-3 High-temperature/high-humidity test

Subject the object to the environmental conditions of +60°C and 90-95% r.h. for 96 hours, then expose to normal temperature/humidity for 24 hours or more. After this test, examine its appearance and functions.

5-4 Thermal shock test

Subject the object to cyclic temperature change (-40°C, 2 hours $\rightleftharpoons$ +85°C, 2 hours) for 100 cycles, the expose to normal temperature/humidity for 24 hours or more.

5-5 Vibration test

5-5-1 Sinusoidal vibration test

Subject the object to vibrations of 5 to 200 to 5Hz swept in 10 minutes, 4.5G at maximum (2mm amplitude), in X and Y directions for two hours each and in Z direction for four hours. After this test, examine its appearance functions.

5-5-2 Vibration test in packaged condition

Subject the object, which is packaged as illustrated, to vibrations of 15 to 60 to 15Hz swept in 6 minutes, 4G at maximum (2mm amplitude at maximum), applied in X, Y and Z directions for two hours each, i.e. six hours in total. After this test, examine its appearance and functions.

5-6 Free fall test in packaged condition

Drop the object, which is packaged as illustrated, to a concrete surface from the height of 90 cm, on one comer, three edges and six faces once each, i.e. 10 times in total. After this test, examine its appearance and functions.

5-7 Soldering heat resistance test

The lead pins of the unit are soaked in solder bath at $260 \pm 5^\circ\text{C}$ for 10 seconds. After this test, examine its appearance and functions.

SPEC NO.	SP03AB15751-3060	ISSUED DATE	2019.01.09	PUBLISHED BY
PRODUCT NAME	PA025Z6D000	VERSION	01	
		PAGE	4/12	

5-8 Adhesion test

The device is subjected to be soldered on test PCB. Then apply 0.5Kg (5N) of force for 5 ± 1 seconds in the direction parallel to the substrate. (The soldering should be done by reflow and be conducted with care so that the soldering is uniform and free of defect by stress such as heat shock).

6 Inspection

As for the examination during mass production, we place the antenna in the production fixture individually, using the network analyzer to compare its central frequency, bandwidth, and return loss with that of the golden sample.

7 Test Record

A Copy of test record filled with following contents shall be provided at time of delivery.

7-1 Quantity of delivery

7-2 Measurement of electrical characteristics

Following data at normal temperature obtained by the method described in section 17.

7-3 Temperature and humidity of test

Quantity for sampling inspection shall be $n=5$ for any lot. In case quantity per lot is less than 5, the whole lot shall be inspected.

8 Warranty

If any defect occurs from the product during proper use within a year after delivery, it will be repaired or replaced free of charge.

9 Others


Any question arising from this specification manual shall be solved by arrangement made by both parties.

10 Precautions for Use

- Antenna pattern use a silver electrode.
- Please don't use the corrosion gas (sulfur gas, chlorine gas) in the atmosphere.
- Please don't direct solder onto the silver electrode of Antenna pattern.


SPEC NO.	SP03AB15751-3060	ISSUED DATE	2019.01.09	PUBLISHED BY
PRODUCT NAME	PA025Z6D000	VERSION	01	
		PAGE	5/12	

11 Shape and Dimension

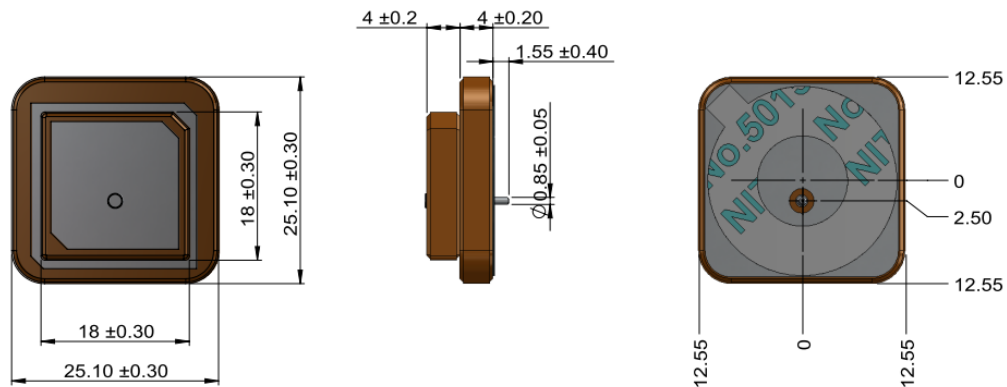


12 Typical Electrical Characteristics (T=25°C)

Return Loss, SWR, Impedance, measured on the test fixture.

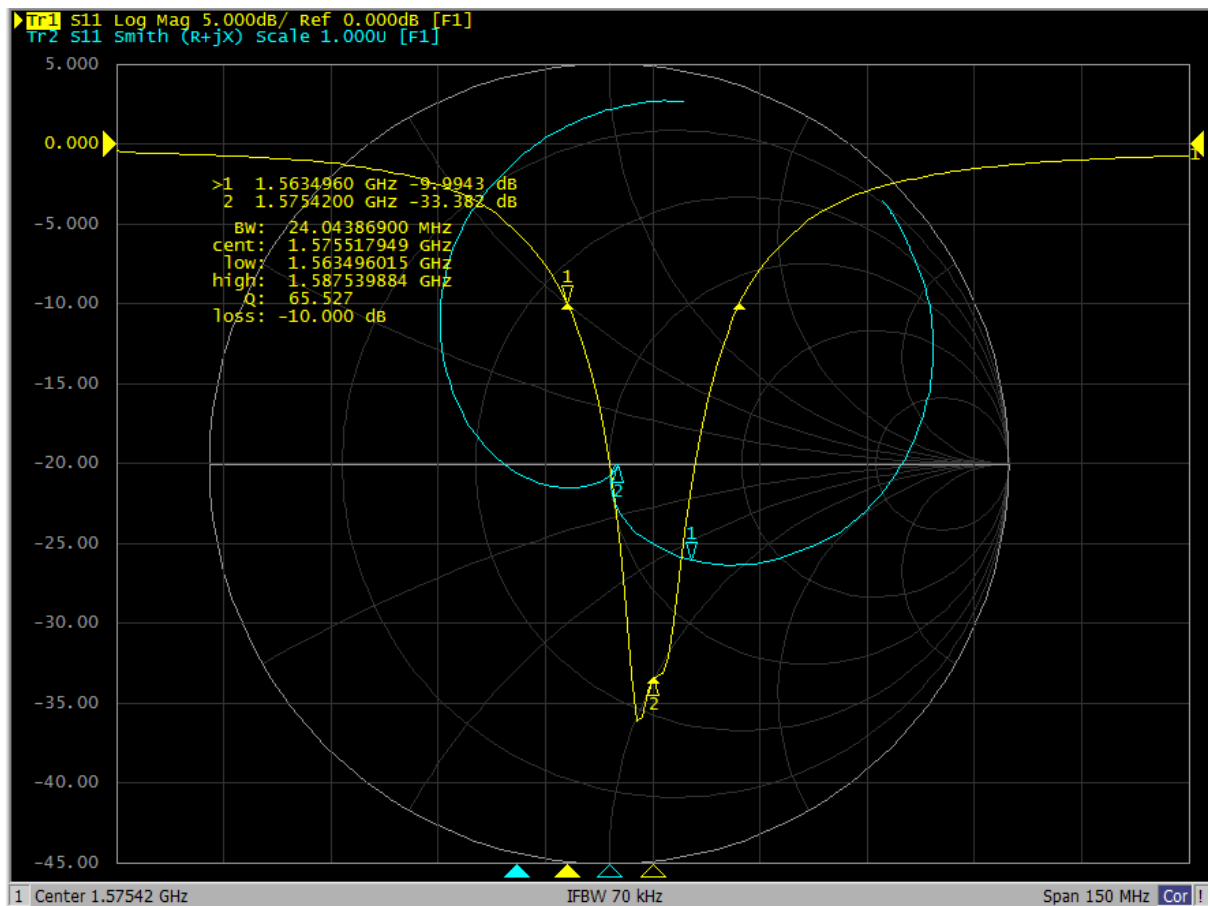



L1

SPEC NO.	SP03AB15751-3060	ISSUED DATE	2019.01.09	PUBLISHED BY
PRODUCT NAME	PA025Z6D000	VERSION	01	
		PAGE	6/12	


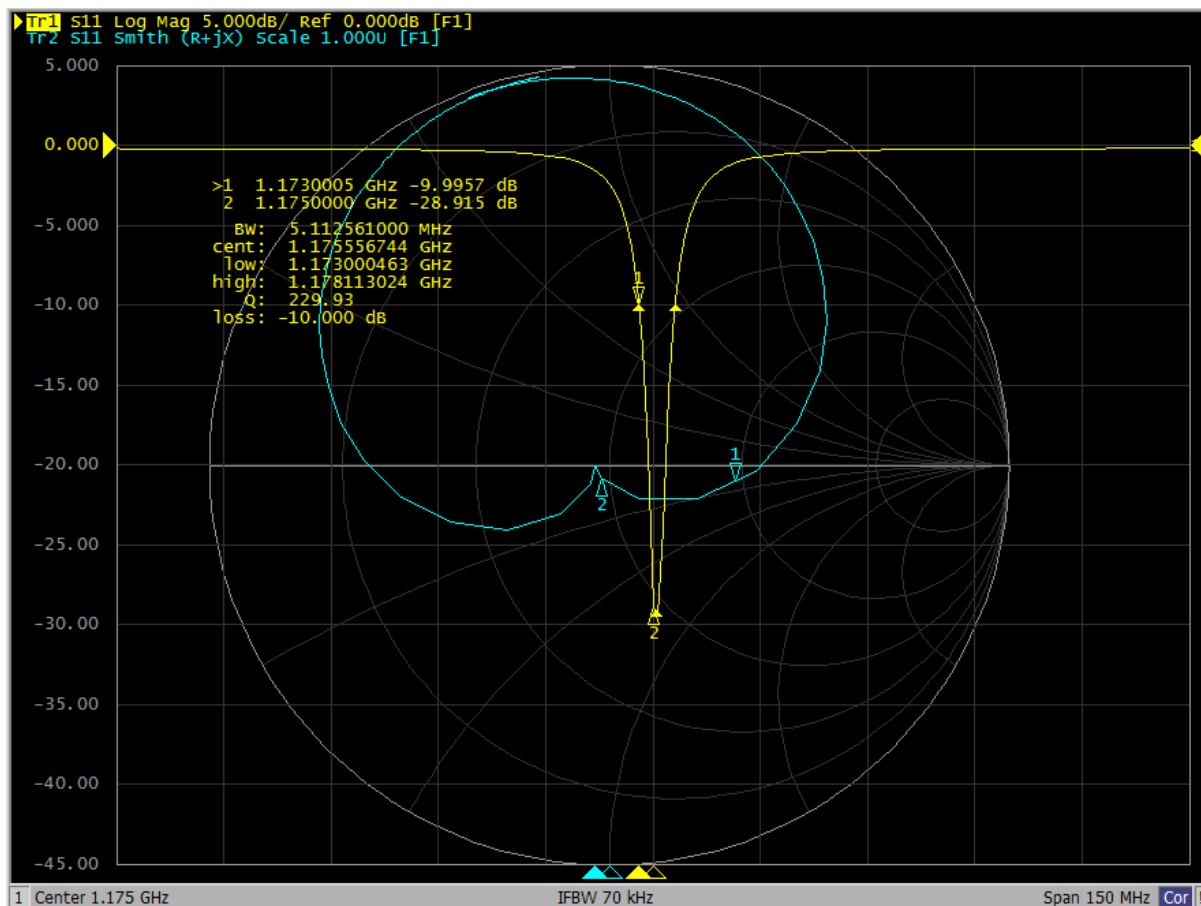


L5

DA18、DA25 in L1+L5 Patch PCB S11 Return Loss & Smith Chart Measure

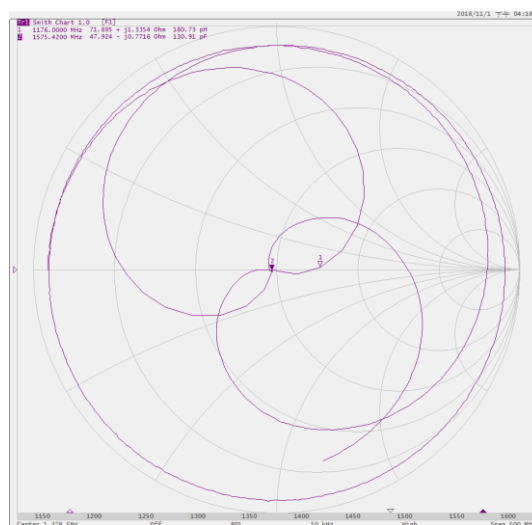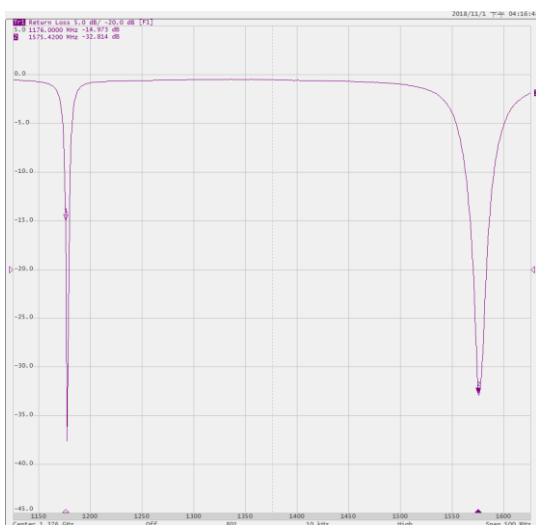


SPEC NO.	SP03AB15751-3060	ISSUED DATE	2019.01.09	PUBLISHED BY
PRODUCT NAME	PA025Z6D000	VERSION	01	
		PAGE	7/12	

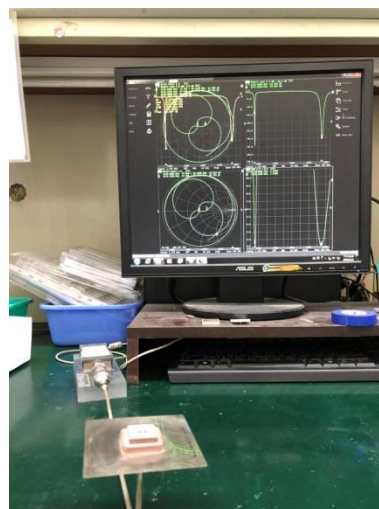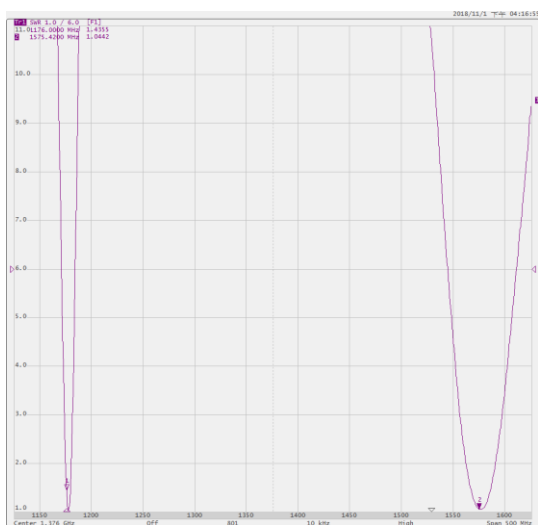


13 2D Radiation Pattern


XZ-Plane

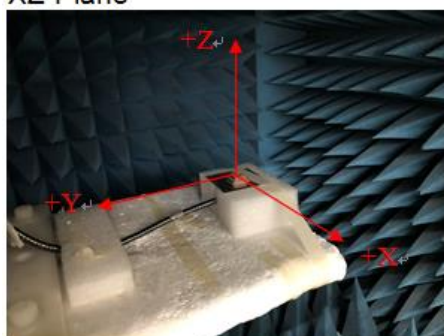

YZ-Plane

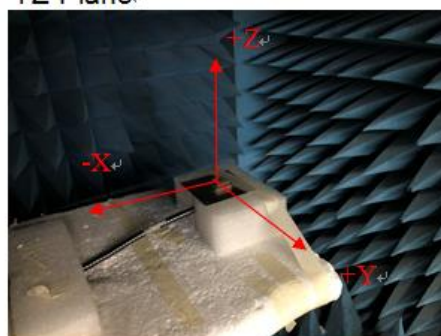

SPEC NO.	SP03AB15751-3060	ISSUED DATE	2019.01.09	PUBLISHED BY
PRODUCT NAME	PA025Z6D000	VERSION	01	
		PAGE	8/12	

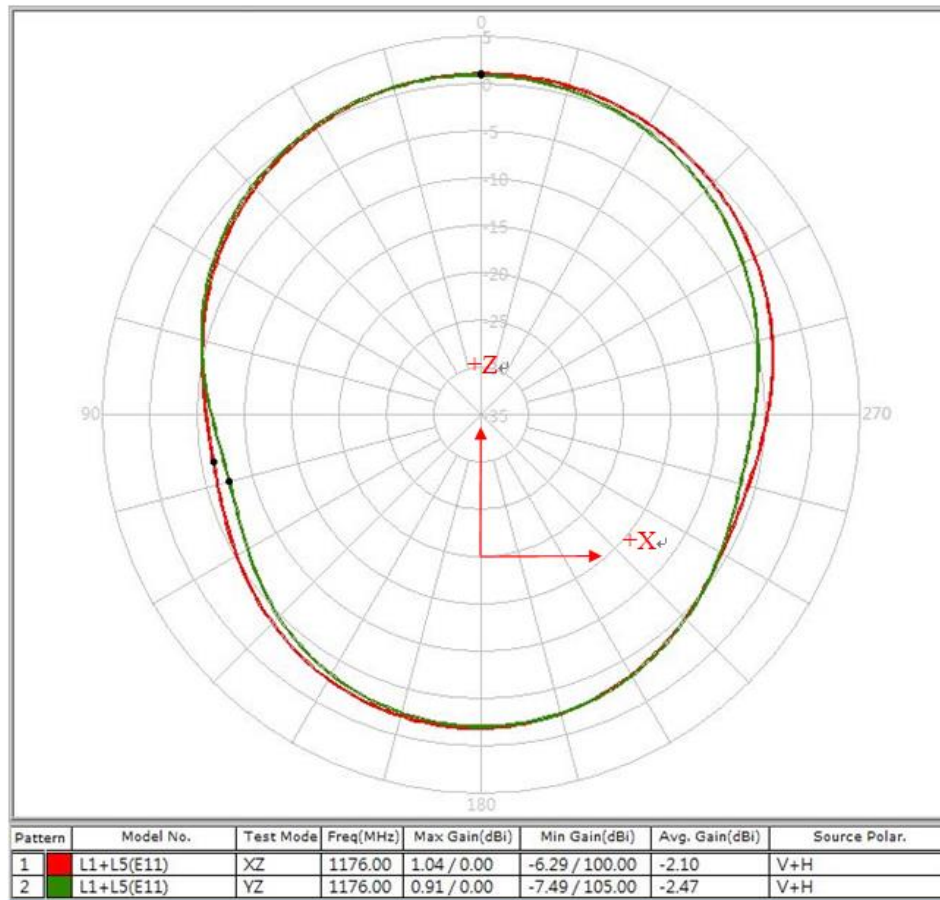


XZ+YZ -Plane 1176 MHz

1176 MHz	Peak Gain	Zenith Gain
XZ	1.04	1.04
YZ	0.91	0.91

(dBi)

SPEC NO.	SP03AB15751-3060	ISSUED DATE	2019.01.09	PUBLISHED BY
PRODUCT NAME	PA025Z6D000	VERSION	01	
		PAGE	9/12	

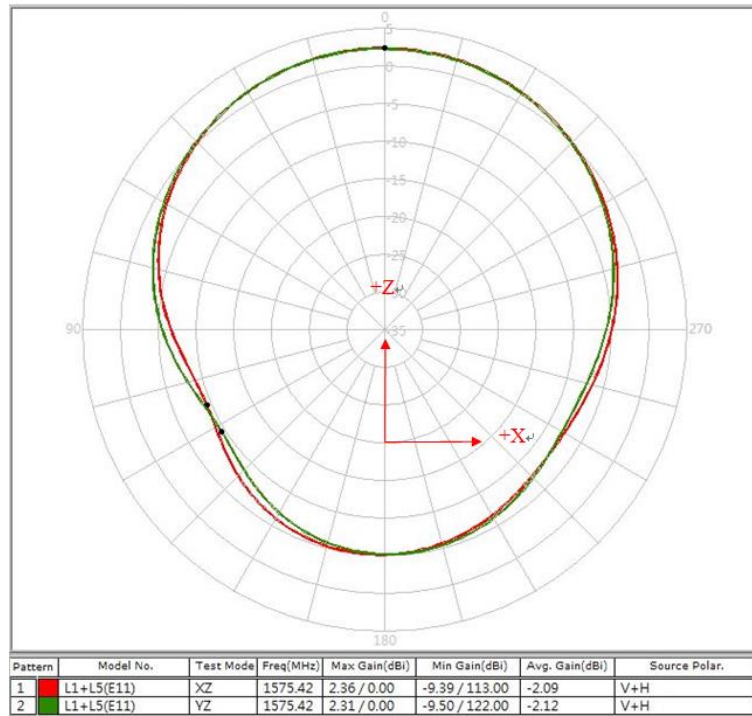


XZ+YZ -Plane 1575.42 MHz

1575.42 MHz	Peak Gain	Zenith Gain
XZ	2.36	2.36
YZ	2.31	2.30

(dBi)


14 Tape Dimension

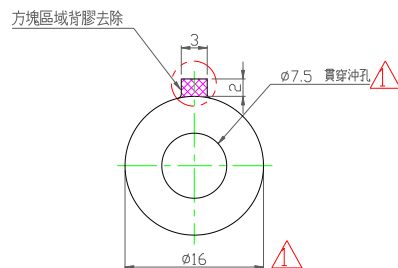

備註: 1.NITTO: NO.5015
2.Double-coated adhesive tape for industrial use
3.Thickness: 0.12mm
4.未標示公差為±0.2

L1 Use


SPEC NO.	SP03AB15751-3060	ISSUED DATE	2019.01.09	PUBLISHED BY
PRODUCT NAME	PA025Z6D000	VERSION	01	
		PAGE	10/12	

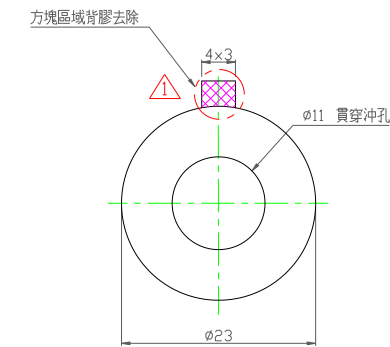

備註:1.NITTO :NO.5015
2.Double-coated adhesive tape for industrial use
3.Thickness :0.12mm

L5 Use


15 Mark



NOTE:
X: manufacture location
T: CIRCOMM TAINAN

SPEC NO.	SP03AB15751-3060	ISSUED DATE	2019.01.09	PUBLISHED BY
PRODUCT NAME	PA025Z6D000	VERSION	01	
		PAGE	11/12	

16 Test Fixture Antenna Setup & Measurements

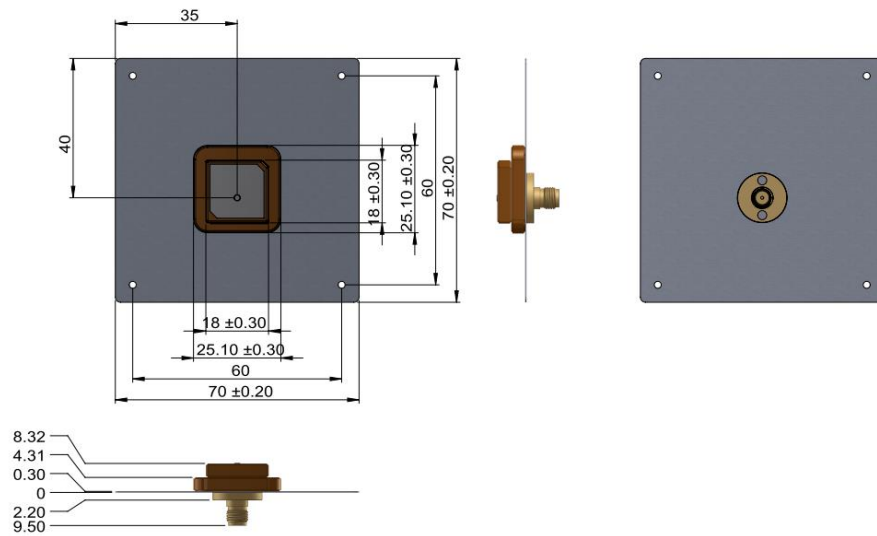


17 DA package disassembly



SPEC NO.	SP03AB15751-3060	ISSUED DATE	2019.01.09	PUBLISHED BY
PRODUCT NAME	PA025Z6D000	VERSION	01	
		PAGE	12/12	

18 Packing

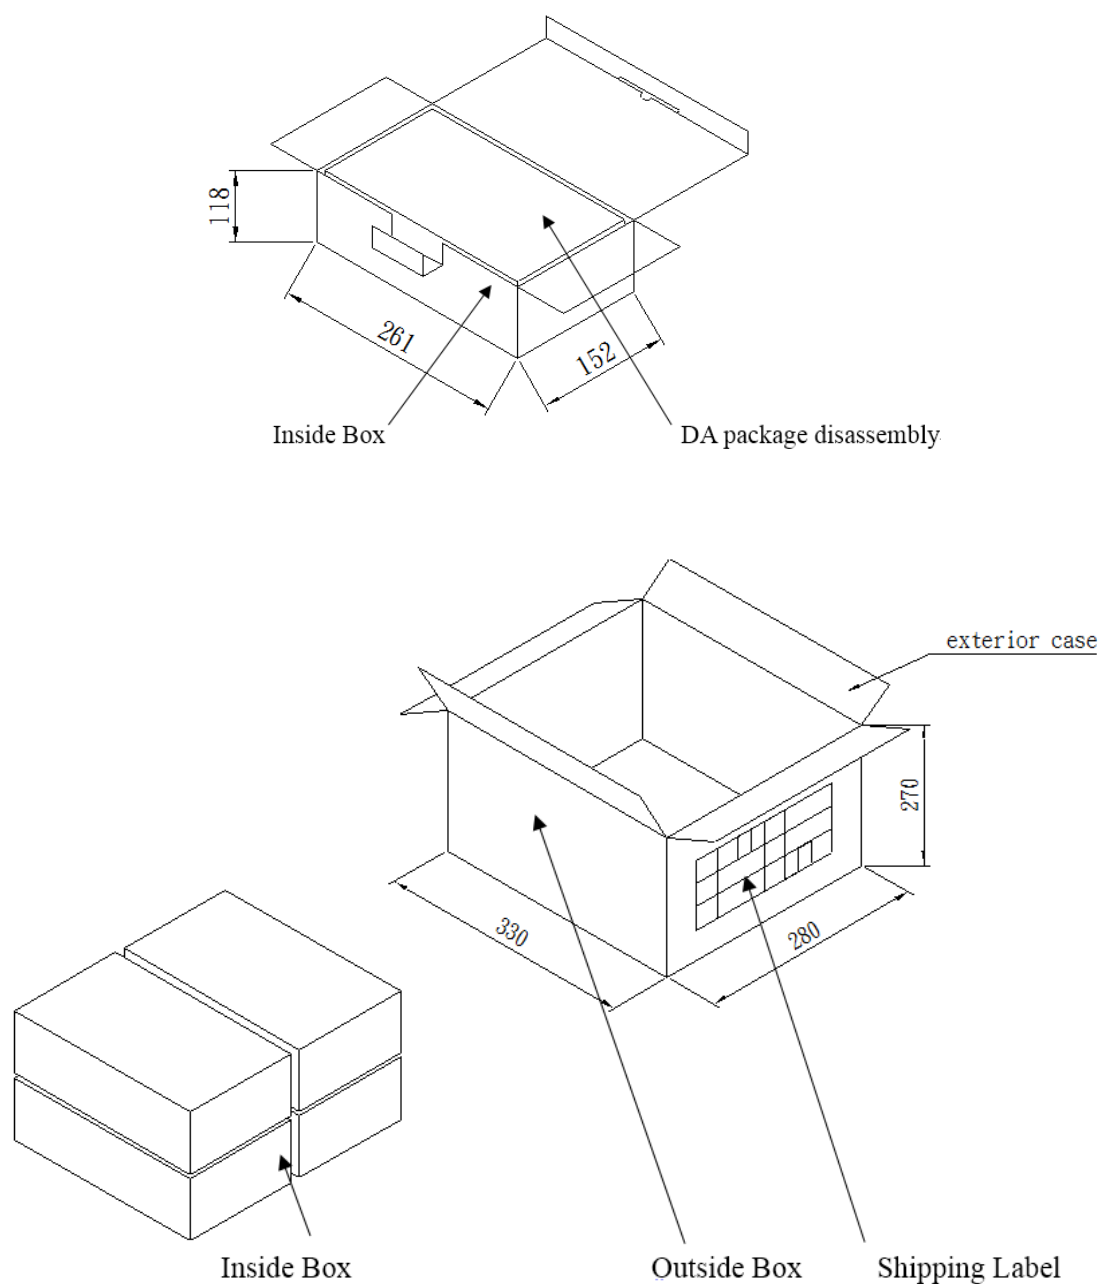

客戶訂單 Cust P/O#		客戶 Cust		太盟料號 CIROCOMM P/N#		批號 LOT#	
客戶料號 Cust Item#				品名規格 Item SPEC			
廠商名稱 MANUFACTURER	太盟光電科技股份有限公司 CIROCOMM TECH. CORP.			出貨日期 DELIVERY DATE		數量 QTY.	